
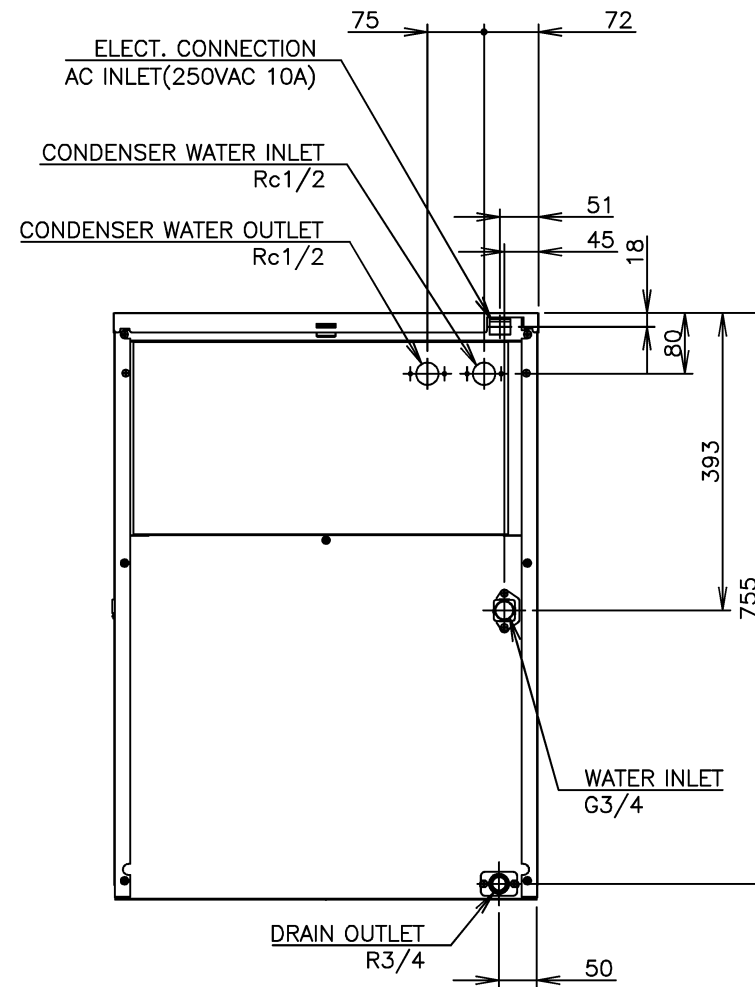
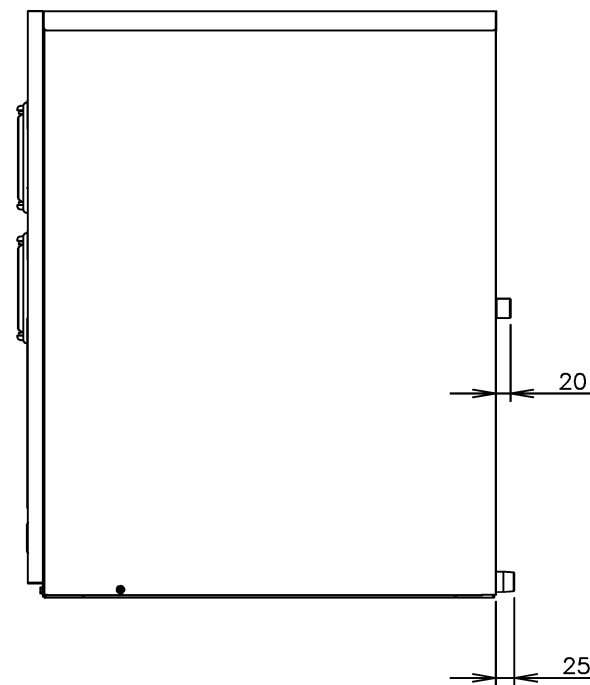
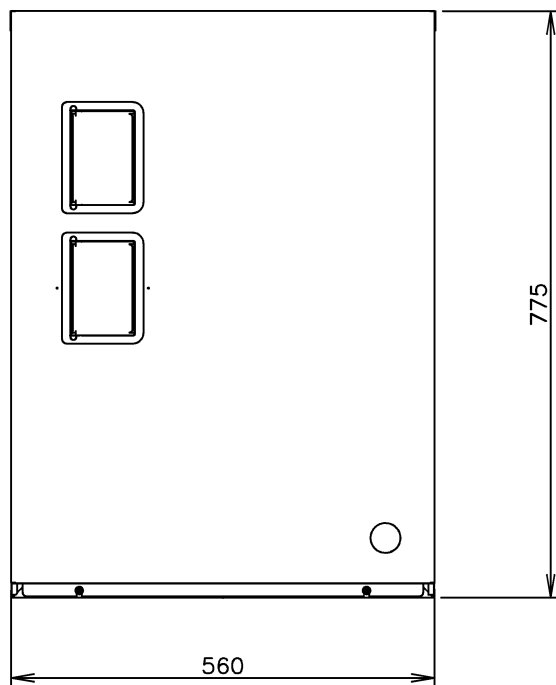


1. Install the product properly in accordance with the instructions on location, water supply/drain connections and electrical connections stated in the instruction and installation manuals provided. Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).
2. The ice production depends on the ambient and water temperatures. Refer to the instruction manual.
3. Product Code: M028-C207

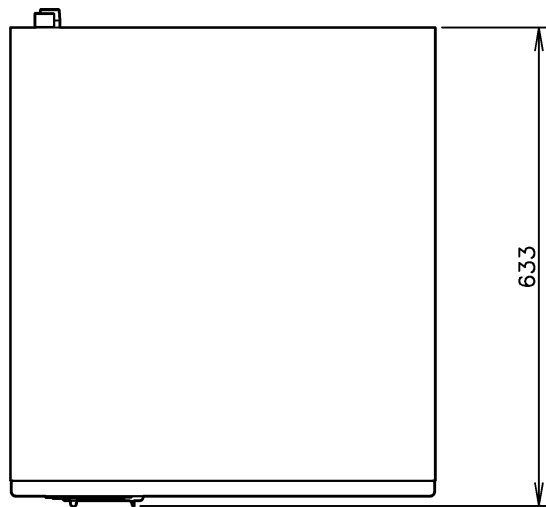

| | | |
|-------------------------------------|---|------------------|
| ITEM | Hoshizaki Cube Ice Maker | |
| MODEL | IM-220AWB-Z | |
| POWER SUPPLY | 1 Phase 220V 50Hz Capacity: Min. 2.3kVA(10.5A) | |
| AMPERAGE | Running: 4.2A Rated Motor: 4.2A Starting: 38A | |
| ELECTRIC CONSUMPTION | Rated Motor: 785W (Power factor: 84%) | |
| ICE PRODUCTION PER 24h | Approx. 180kg(5mm)/195kg(15mm) (AT.10°C, WT.10°C) Approx. 170kg(5mm)/180kg(15mm) (AT.21°C, WT.15°C) Approx. 150kg(5mm)/165kg(15mm) (AT.32°C, WT.21°C) | |
| POTABLE WATER CONSUMPTION PER 24h | Approx. 0.46m ³ (AT.10°C, WT.10°C) Approx. 0.43m ³ (AT.21°C, WT.15°C) Approx. 0.38m ³ (AT.32°C, WT.21°C) | |
| CONDENSER WATER CONSUMPTION PER 24h | Approx. 0.81m ³ (AT.10°C, WT.10°C) Approx. 1.02m ³ (AT.21°C, WT.15°C) Approx. 1.26m ³ (AT.32°C, WT.21°C) | |
| SHAPE OF ICE | Cube Approx. 28×28×32mm | |
| FREEZE CYCLE TIME | Approx. 26min (5mm) (AT.21°C, WT.15°C) | |
| ICE PRODUCTION PER CYCLE | Approx. 3.36kg/140pcs. (AT.21°C, WT.15°C) | |
| DIMENSIONS | 560mm(W)×633mm(D)×775mm(H) | |
| EXTERIOR | Stainless Steel | |
| INSULATION | Polyurethane Foam | |
| INSULATION FOAM BLOWING AGENT | N/A | |
| CONNECTIONS - ELECTRIC | X-Type Connection | |
| CONNECTIONS-WATER SUPPLY | Inlet G3/4 Cond. Inlet Rc1/2 (connected at rear side) | |
| CONNECTIONS-DRAIN | Outlet R3/4 Cond. Outlet Rc1/2(connected at rear side) | |
| ICE MAKING SYSTEM | Cell type | |
| HARVESTING SYSTEM | Hot Gas Defrost | |
| COMPRESSOR | Hermetic | |
| CONDENSER | Water-cooled | |
| EVAPORATOR | Electroless Nickel Plated Copper Tube on Sheet and Cells | |
| REFRIGERANT CONTROL | Thermostatic Expansion Valve | |
| REFRIGERANT CHARGE | R404A/400g | |
| ICE MAKING CONTROL SYSTEM | Thermistor, Timer | Controller Board |
| HARVESTING CONTROL SYSTEM | Thermistor | |
| BIN CONTROL SYSTEM | Microswitch with Time Delay | |
| ICE MAKING WATER CONTROL SYSTEM | Timer, Water Pan's movement | |
| ELECTRICAL PROTECTION | Class I Appliance, 5A Fuse | |
| COMPRESSOR PROTECTION | Auto-reset Overload Protector (Internal) | |
| ICE MAKER PROTECTION | Interlock by Controller Board | |
| WEIGHT | 69kg (Gross 76kg) | |
| PACKAGE | Carton 644mm(W)×728mm(D)×878mm(H) | |
| ACCESSORIES | Installation Kit, Funnel | |
| OPERATING CONDITIONS | Ambient Temp.: 1 - 40°C, Water Supply Temp.: 5-35°C Water Supply Pressure: 0.7-7.8bar(0.07-0.78MPa), Voltage Range: Rated Voltage±6% | |

* We reserve the right to make changes in specifications and design without prior notice.

HOSHIZAKI CUBE ICE MAKER IM-220AWB-Z

| | | | | | |
|------------------------|----------------|---------------------|------------------|--------------------|-----------------------|
| APPROVED KUROYANAGI | CHECKED QYL | DESIGNED WANGXIN | DRAWN WANGXIN | SCALE 1/10 | TRIGONOMETRY |
| * APPROVED | * DESIGNED | * SYMBOL | * DATE | DATE 2022.07.13 | DRAWING NO. D34096 |